


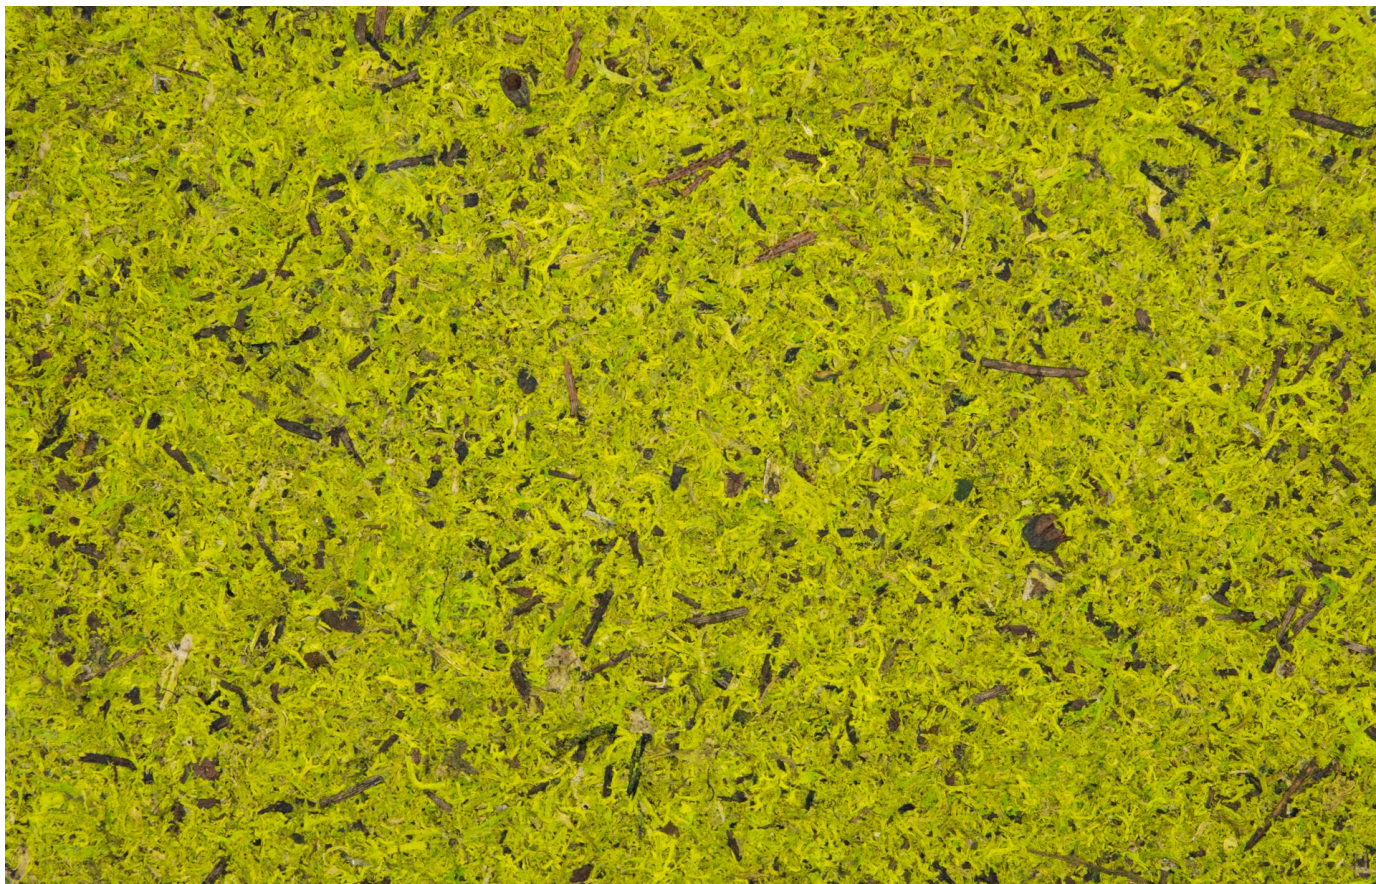

MOSS LIGHT GREEN - on flax backing, adhesive foil

Artikel Nr. MOSHGR0085FVPST

Light green moss from upcycling on breathable flax fleece.

Bright, fresh, lush! With MOOS LIGHT GREEN, bring the radiant green of the forest straight into your space. The moisture-regulating properties of real moss help maintain a healthy indoor climate, while its vibrant colour creates a fresh, lively atmosphere. Bring the richness of the forest indoors.

Order your DIN A5 sample now!

Upcycled light green moss in full, premium coverage, available on various backings – making every application in interior design possible.

Characteristics


Raw material	COLOURFUL LIGHT GREEN MOSS
Scent	● ○ ○
Light fastness	● ● ○
Abrasion resistance	● ● ●
Vibrancy	● ● ●

Technical details


Backing	Flax Backing
Format	2.950 x 1.360 mm
MOQ	1 sheet (4,012 m ²)
Weight	600 g/m ²
Thickness	0,8 mm
Flexibility	Bending radii up to 0,5 mm
Translucency	opaque

Material details


Wallpapering technique	Do not apply glue to the back of the wallpaper, but to the surface. Please note our glue recommendations.
-------------------------------	--



Overlap and double-cut	Each panel overlaps approx. 2 cm with the one next to it. Please note the edge tolerance.
-------------------------------	---



Free match	Free match The naturally scattered materials do not require matching patterns between panels.
-------------------	--



Breathable	The natural flax fleece backing is breathable, unbleached, ecological and climate regulating.
-------------------	---



Processing

Wallpaper

Installation of Organoid® natural surfaces on flax fleece as a wallpaper:

- Wall-pasting technique
- Pay attention to Organoid glue recommendations
- Double cut: Each panel overlaps with the one next to it (approx. 2 cm)
- Cut with scissors, cutter or plotter
- Pre-trials recommended
- In the case of wallpapers, the effect is to be checked after processing three strips. Claims that go beyond the replacement of defective goods will not be accepted.

Processing


Décor

Installation of Organoid® natural surfaces on flax fleece in woodworking (décor):

- Process with normal wood-working machinery
- Glue (e.g. white glue) is applied onto the wooden materials, as the fleece absorbs moisture and glue stains may appear on the front if glue is applied to the fleece
- Cover the natural surface with the enclosed separating paper
- pressing temperature. 60°C
- For sensitive wood-working applications, use a counter-balance (enclosed on request)
- Cut with scissors, cutter or plotter
- Pre-trials recommended

Processing

Inspiration

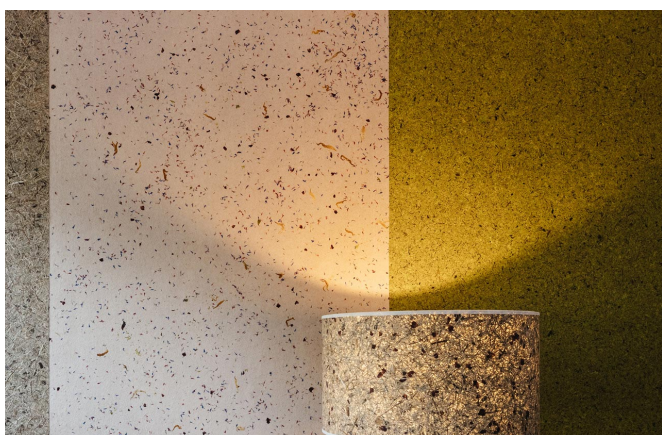

ORGANOID GmbH

6500 Fließ

Nesselgarten 422

www.organoids.com

info@organoids.com

Tel. [+43 5449 200 01](tel:+43544920001)

18.2.2026